

# AD TexTrace™ Soft Fabric

## Product characteristics

---

**Level of Integration**

Fully

---

**Process of Integration**

Stitching

---

**Inventory Management**

Fully

---

**EAS Functionality**

Fully

---

**Self Check-Out Functionality**

Fully

---

**Support Use-Cases beyond POS**

Partly via QR link

---

**Printing**

Thermal

---

**Encoding**

Standard

---

**Washability / Durability**

High

---

**Softness / touch&feel**

High

---

**Sustainability**

RPET base material





## Durability for sustainability in a circular world

The AD TexTrace™ Soft Fabric solution is designed and developed to remain with the garment for a longest possible time without compromising its functionality. It's offered in two standard dimensions (widths of 10mm and 20mm) and two main colour options (white and black). The Soft Fabric label can be processed with standard RFID thermal transfer printers and has a durability of minimum five home washing cycles in the standard version.

Standard variants in terms of dimension, colour and durability are possible and/or under development.

## Read Range for Antenna Design AC71

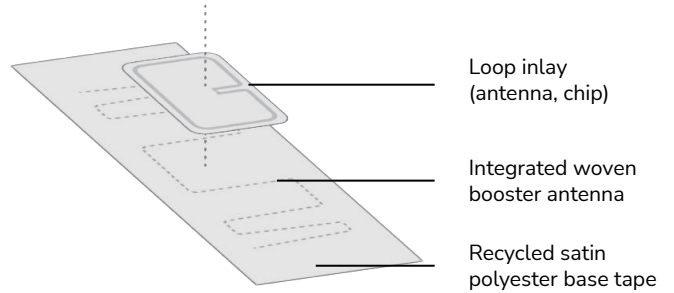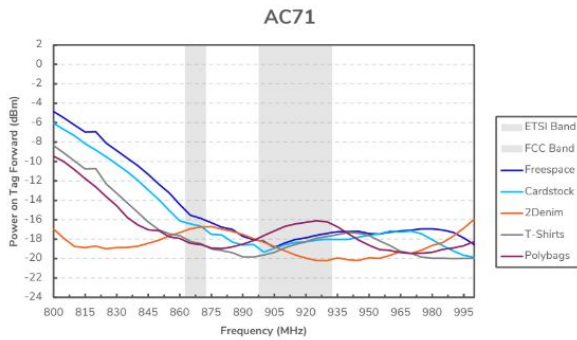

All graphs are indicative: performance in real life applications may vary.

## Product Information & Technical Data

<b>Label</b>	
Label Dimension (width x length folded/total)	Standard 10mm x 65mm/80mm or 20mm x 55mm/70mm
Label Fabric Quality	Yarn 100% recycled PET
<b>Inlay - Woven Booster Antenna</b>	
	AC73 (10mm) - Dimension 7.2mm x 60.0mm
	AC71 (20mm) - Dimension 12.5mm x 50.0mm
<b>Inlay - Loop Module</b>	
	Standard Lands (Impinj M730/Art. 3007780; NXP U9 in development)
<b>Inlay Substrate Material</b>	
	Recycled PET
<b>Print&amp;Encode</b>	
	Snap700 validated
<b>Durability / Washability</b>	
	Standard 5 home washing cycles guaranteed   test acc. to AATCC 61 2A
<b>Operating Temperature</b>	
	-40 to 185F (-40 to 85C)
<b>RoHS</b>	
	EU Directive 2011/65/EU Compliant and 2015/863 Compliant
<b>Quality Assurance</b>	
	100% read tested with out-of-tolerance inlay(s) being marked