

# AD-238u8

## Overview

---

**Frequency Band**

UHF 860 - 960 MHz

---

**Chip**

NXP UCODE 8

---

**Antenna Dimensions**

70 x 14.5 mm / 2.76 x 0.57 in

---

**International Standard**

ISO/IEC 18000-63 Type C

---

**Industry Segments**

Apparel  
Industrial Applications

---

**Applications**

Brand Protection  
Supply Chain Management  
Home Essentials

---

**RoHs**

EU Directive 2011/65/EU and  
2015/863 Compliant

---



## Fit for a wide variety of RFID tagging applications

AD-238u8 inlays from Avery Dennison provide maximum performance on a given footprint of 70 x 14,5 mm. Leveraging the capabilities of NXP's UCODE 8 chip, the Gen2 UHF RFID inlays are suitable for a wide variety of RFID tagging applications, including supply chain, inventory & logistics, apparel and home essentials.


AD-238u8 inlays feature 128-bit of EPC memory and a 96-bit unique factory-locked TID number. A 48-bit unique serial number is factory-encoded into the TID. Delivery formats include dry, wet and pressure sensitive label.

Like all RFID products from Avery Dennison Intelligent Labels, AD-238u8 inlays are manufactured according to the industry's highest quality standards, as confirmed by the RFID Lab at Auburn University: The inspection body awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.


## Technical features

<b>Chip</b>	NXP UCODE 8		
<b>EPC and User Memory</b>	128-bit and n/a		
<b>TID Memory</b>	96-bit / 48-bit unique serial number		
<b>Product Code</b>	RF600958	RF600959	RF100413
<b>Delivery Format</b>	Dry inlay	Wet inlay	Label / sticker
<b>Die-cut Dimension</b>	-	73 x 17 mm / 2.87 x 0.67 in	76 x 20 mm / 3.00 x 0.80 in
<b>Inlay Substrate</b>	PET	PET	40# Paper
<b>Face Sheet</b>	-	-	TT2C (FASSON®) Bright White
<b>Total Thickness</b>	10 – 12 mils / 261 – 312 microns	12 – 14 mils / 300 – 350 microns	16 – 18 mils / 412 – 463 microns
<b>Standard Pitch</b>	22.23 mm / 0.875 in	22.23 mm / 0.875 in	38.1 mm / 1.5 in
<b>Web Width</b>	74 mm / 3 in	76 mm / 3 in	82.6 mm / 3 in
<b>Core Size</b>	152 mm / 6 in	76 mm / 3 in	76 mm / 3 in
<b>Quantity / Reel</b>	40000 pcs/reel	10000 pcs/reel	3154 pcs/reel
<b>Operating Temperature</b>	-40 °C to 85 °C -40 °F to 185 °F		
<b>On-Metal</b>	Non metal		
<b>Certificate</b>	ARC		

## Orientation sensitivity

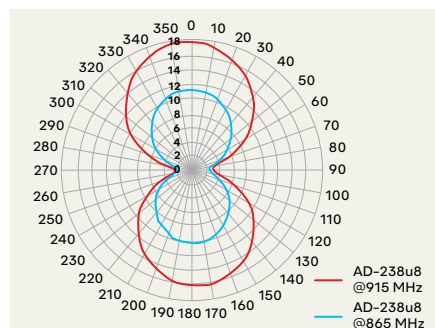

## Read range

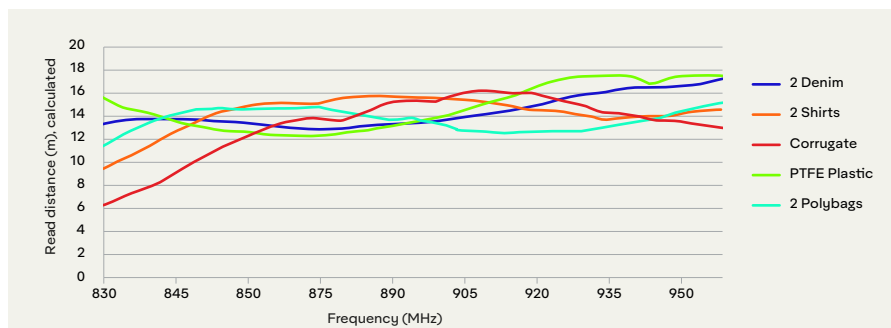

All graphs are indicative: performance in real life applications may vary.

## Contact information

[rfid.averydennison.com/contact](http://rfid.averydennison.com/contact)

North America: +1-866-903-7343 (toll free US)

International: +1-678-617-2359

RoHS

© 2020 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

**Warranty:** Please refer to Avery Dennison Intelligent Labels standard terms and conditions: [rfid.averydennison.com/termsandconditions](http://rfid.averydennison.com/termsandconditions)

**Care and handling:** RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

**Applications:** This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

