

AD-324u8 FCC

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

NXP UCODE 8

Antenna Dimensions

41 x 16 mm / 1.63 x 0.63 in

Die-cut Dimensions

54 x 25 mm / 2.13 x 0.98 in (folded)

International Standard

ISO/IEC 18000-63 Type C

Industry Segments

Apparel
Logistics
Healthcare

Applications

Supply Chain Management
Home Essentials
Inventory and Logistics

RoHS

EU Directive 2011/65/EU and
2015/863 Compliant



Excellent read range and versatility

AD-324u8 ETSI inlays from Avery Dennison are ideally suited for a wide variety of RFID tagging applications, particularly those related to the areas of supply chain, inventory & logistics, apparel, and pharmaceutical & healthcare.

The Gen2 UHF RFID inlay's 41.4 x 16mm design is optimized for outstanding performance in the ETSI frequency band (865-868 MHz) and features the UCODE 8 IC by NXP. An FCC-specific design with identical footprint is available as well.

AD-324u8 ETSI's UCODE 8 chip features 128-bit of EPC memory and a 96-bit unique factory-locked TID number. A 48-bit unique serial number is factory encoded into the TID. UCODE 8 supports all mandatory commands of EPC global specification V.2.0.1 including (Perma) LOCK and Kill Command.


Delivery formats include dry, wet and paper inlay.

Like all RFID products from Avery Dennison, AD-324u8 ETSI inlays are manufactured according to the industry's highest quality standards, as confirmed by the RFID Lab at Auburn University: The inspection body awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.


Technical features

Chip	NXP UCODE 8		
EPC and User Memory	128-bit and n/a		
TID Memory	96-bit / 48-bit unique serial number		
Product Code	RF601478	RF601480	RF100606
Delivery Format	Dry inlay	Wet inlay	Label / sticker
Die-Cut Dimension	44 x 19 mm / 1.75 x 0.75 in		
Inlay Substrate	38um Paper	38um Paper	5 pt Paper
Total Thickness	10 - 12 mils / 249 - 300 microns	11 - 13 mils / 287 - 337 microns	14 - 16 mils / 368 - 419 microns
Standard Pitch	25.4 mm / 1 in	25.4 mm / 1 in	22.2 mm / 0.875 in
Web Width	50.8 mm / 2 in		
Core Size	76 mm / 3 in		
Quantity / Reel	20000 pcs/reel	20000 pcs/reel	5966 pcs/reel
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F		
On-Metal	Non metal		
Certificate	ARC		

Orientation sensitivity

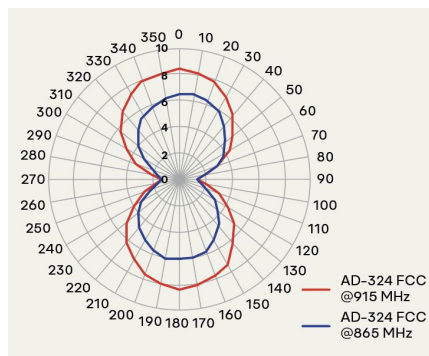

Read range

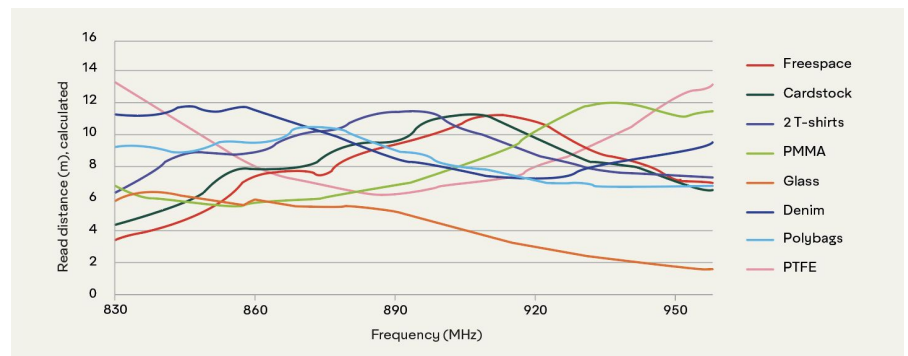

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact
North America: +1-866-903-7343 (toll free US)
International: +1-678-617-2359

Connect with us on:



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

