


AD Bolt M830 ETSI

Unleashing exceptional performance across diverse applications

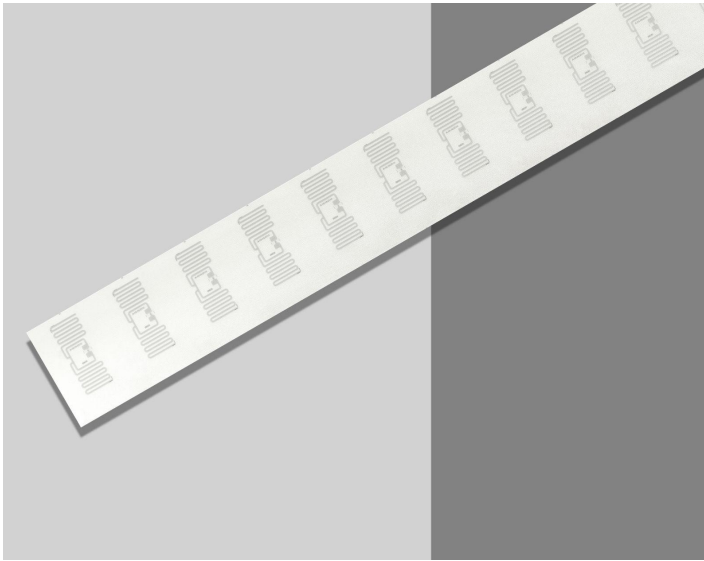

AD Bolt M830 ETSI inlays from Avery Dennison Smartrac offer superior performance across various RFID tagging applications. These include supply chain, inventory and logistics, apparel, and general retail. The Apparel design is particularly effective for retailers, providing consistent high read rates with a small label footprint, and performing significantly well on fabric, denim, plastic & cardstock materials.

Featuring the impinj M830 IC, AD Bolt M830 ETSI is equipped with 128-bit of EPC memory and 96-bit unique factory locked TID number. A 48-bit unique serial number is factory-encoded into the TID. The improved readability of the new IC offers reliable reading of small tags at high volume and speed which supports the global IoT deployments. AD Bolt M830 ETSI carries a 42.5 x 17mm (1.67 x 0.67in) antenna footprint and is offered in a 2-ply PFL format.

Like all RFID products from Avery Dennison, AD Bolt M830 ETSI inlays are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, especially in the retail environment. The RFID Lab at Auburn University has awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.

Overview


Frequency Band	UHF 860 - 960 MHz
Chip / Chip Attachment Technology	Impinj M830 / Strap Attach
Antenna Dimensions	42.5 x 17 mm / 1.67 x 0.67 in
International Standard	ISO/IEC 18000-63 Type C
Industry Segments	Apparel General Retail
Applications	Brand Protection Supply Chain Management Inventory and Logistics
RoHS	EU Directive 2011/65/EU and Directive (EU) 2015/863
REACH	Regulation (EC) No. 1907/2006

Technical features


Chip / Chip Attachment Technology	Impinj M830 / Strap Attach
EPC and User Memory	128-bit EPC and 0-bit User Memory
TID Memory	96-bit / 48-bit unique serial number
Product Code	IL-612967
Delivery Format	2-Ply PFL
Die-Cut Dimensions	-
Die-Cut Corner Radius	-
Inlay Substrate	PFL
Face Sheet	PFL
Total Thickness (over chip and release liner)	17.2 - 19.2 mils / 437 - 488 microns
Standard Pitch	40.005 mm / 1.575 in
Web Width	60.020 mm / 2.362 in
Core Size	76 mm / 3 in
Quantity / Reel	TBD pcs/reel
Size of Roll	MAX OD: 11.5"
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F
On-Metal	Non metal

*Other product codes available upon request.

Orientation sensitivity

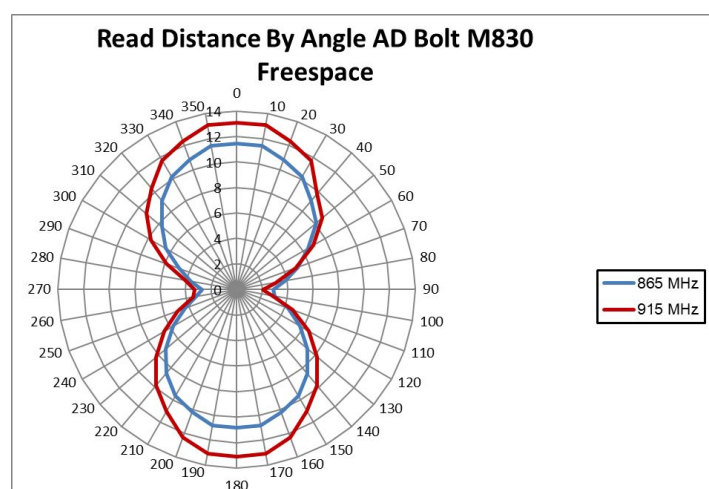

Read range

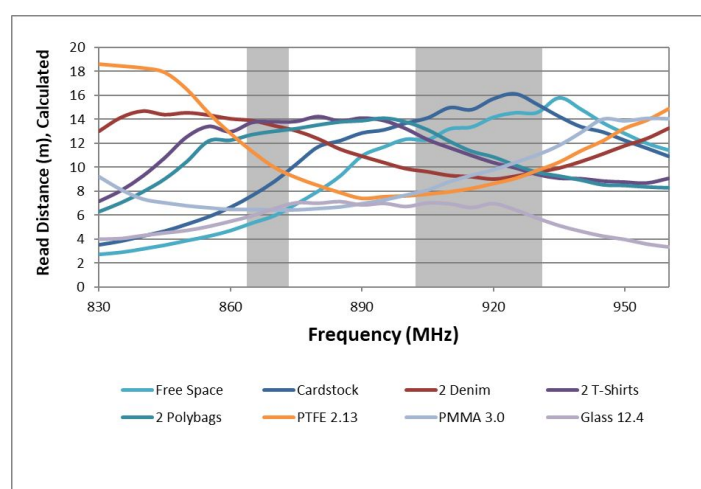

All graphs are indicative: performance in real life applications may vary.

Find more label solutions at
rfid.averydennison.com



#MakingPossible

© 2025 Avery Dennison Corporation. All rights reserved. The "Making Possible" tagline, Avery Dennison and all other Avery Dennison brands, product names and codes are trademarks of Avery Dennison Corporation. All other brands or product names are trademarks of their respective owners. Fortune 500® is a trademark of Time, Inc. Branding and other information on any samples depicted are fictitious. Any resemblance to actual names is purely coincidental.