

AD Dogbone® M730 Dura 2.0

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

Impinj Monza R6-P

Chip Attachment Technology

Direct chip attach (DCA)

Antenna Dimensions

94 x 24 mm / 3.70 x 0.90 in

International Standard

ISO 18000-63 EPC class 1 Gen 2

Industry Segments

Industry
Logistics
Automotive

Applications

Pallet tracking
Returnable transportation items (RTI)

RoHS

EU Directive 2011/65/EC and
Directive (EU) 2015/863

REACH

Regulation (EC) No. 1907/2006



Adding robustness to excellent performance on demanding applications

Our AD Dogbone® M730 Dura 2.0 UHF RFID inlays and tags combine excellent performance on different materials with outstanding robustness and water resistance, washing and heat resistance, vibration, mechanical shock, making them an excellent choice for demanding global supply chain and industrial applications in harsh environments.

AD Dogbone® M730 Dura 2.0 features thick, semi-stiff thermosetting layers attached to both sides of the antenna/IC structure, offering effective protection against mechanical and environmental stresses without affecting the performance of the underlying inlay design. The encasement provides an IP68 rating and is ATEX compatible. It has been tested to meet EN60068-2-27 (mechanical shock) and EN60068-2-6 (vibration) standards. Additionally, it has been subjected to wash cycle testing, demonstrating resistance up to 60 cycles of 60°C home washing and tumble dry, as per ISO6330 and 5A ISO 6330 : 1984 standards. Moreover, it has been tested for heat transfer, enduring 160°C from both sides for 20 seconds.


AD Dogbone® M730 Dura 2.0 provides a level of durability that is comparable to hard tags, and is equipped with the M730 IC from Impinj. The IC comes with 128-bit EPC memory and offers an enhanced autotune feature, which helps the AD Dogbone® M730 Dura 2.0 to work at peak efficiency.

Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.


Technical features

Chip	Impinj M730
Chip attachment technology	Direct chip attach (DCA)
EPC and User Memory	128-bit and 0-bit
TID Memory	96-bit / 48-bit unique serial number
Product Code	3009540 / IL-609916
Delivery Format	Dura
Die-Cut Dimension	97 x 27 mm / 3.819 x 1.063 in
Inlay Substrate	PET
Face Sheet	White PET 50 UL
Total Thickness	321 µm
Standard Pitch	30 mm / 1.181 in
Web Width	100 mm / 3.937 in
Core Size	76 mm / 3 in
Quantity / Reel	1,000 pcs/reel 2,000 pcs/box
Operating Temperature	40 °C to 85 °C / -40 °F to 185 °F


Orientation sensitivity

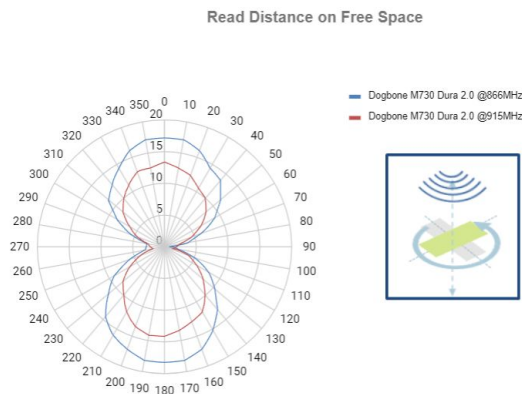

Theoretical read range in Class 1 materials

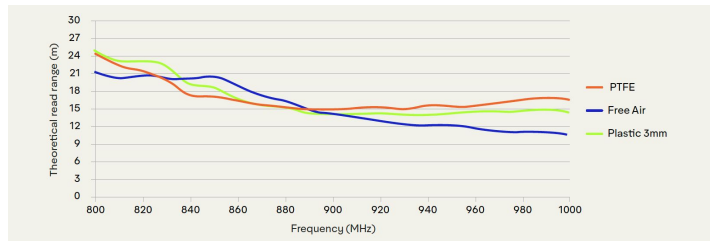

Theoretical read range in Class 2 materials

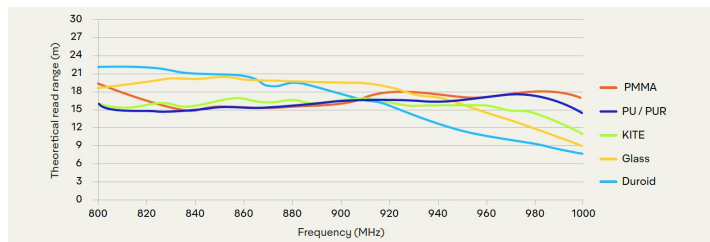

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact
+1-678-617-2359

Connect with us on:



© 2024 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

