

AD Trap M830

Perfect for high-performance item-level identification for space-constrained applications

AD Trap M830 inlays from Avery Dennison Smartrac are perfect for high-performance item-level identification for space-constrained applications. Their compact design and reliable functionality make them ideally suited for pharmaceutical, including liquid healthcare products such as eye drops and mouthwash, delivering strong performance in near-field environments.

Key Features:


Superior RF Stability: Small form factor ideal for difficult-to-tag items.

Outstanding Read Performance: Reliable reading on high-dielectric materials (e.g., glass vials, PCBs).

Impinj M830 Equipped:
128-bit EPC memory
96-bit unique factory locked TID number
48-bit unique serial number factory-encoded into TID

Enhanced Readability: Supports reliable reading of small tags at high volume and speed for global IoT deployments.

Quality & Environmental Compliance: Compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management.

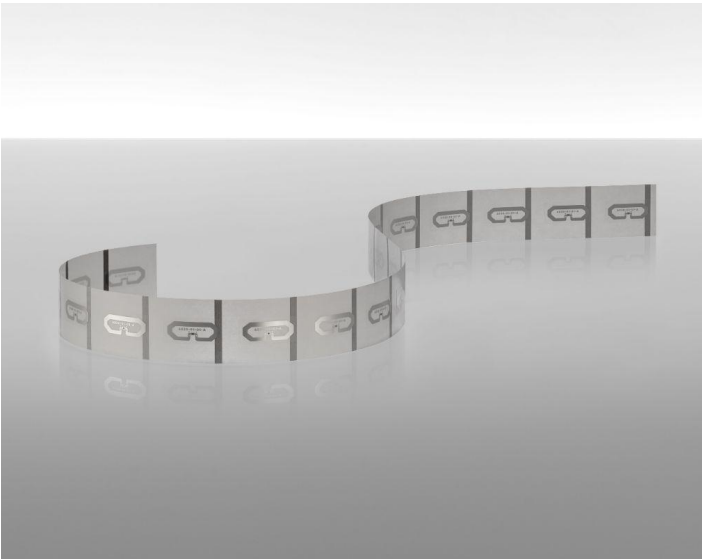

Overview


Frequency Band	UHF 860 - 960 MHz
Chip / Chip Attachment Technology	Impinj M830 / Direct Chip Attach
Antenna Dimensions	8 x 22 mm / 0.32 x 0.87 in
International Standard	ISO 18000-63, EPC Class 1 Gen 2
Industry Segments	Healthcare
Applications	Item Level Inventory Accuracy Brand Protection
RoHS	EU Directive 2011/65/EU and Directive (EU) 2015/863
REACH	Regulation (EC) No. 1907/2006

Technical features

Chip / Chip Attachment Technology	Impinj M830 / Direct Chip Attach
EPC and User Memory	128-bit EPC and 0-bit User Memory
TID Memory	96-bit / 48-bit unique serial number
Product Code	IL-613028
Delivery Format	RIF Wet inlay
Die-Cut Dimensions	11 x 25 mm / 0.43 x 0.98 in
Die-Cut Corner Radius	-
Inlay Substrate	PET
Face Sheet	Clear PET
Adhesive	RA-5
Total Thickness (over chip and release liner)	11.81 mils / 300 microns
Standard Pitch	32 mm / 1.26 in
Web Width	27 mm / 1.06 in
Core Size	76 mm / 3 in
Quantity / Reel	7,100 pcs/reel
Size of Roll	Max OD 12"
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F
On-Metal	Non metal
ARC Certificates	-

*Other product codes available upon request.

Read Distance (UHF Near-Field)

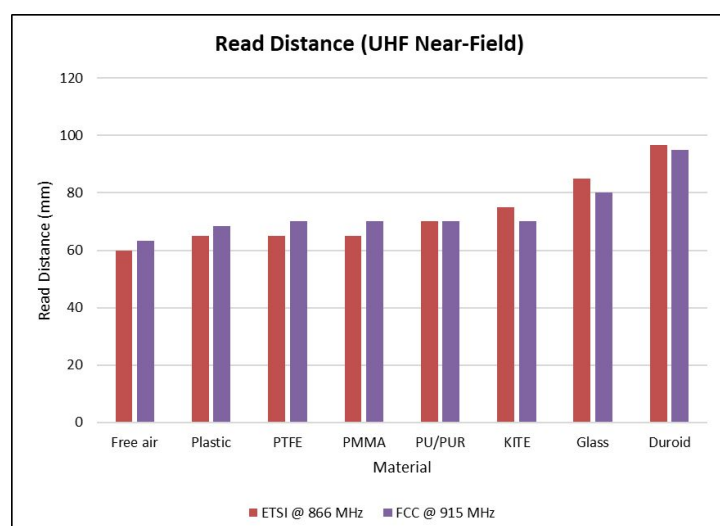

All graphs are indicative: performance in real life applications may vary.

Find more label solutions at
rfid.averydennison.com



#MakingPossible

© 2025 Avery Dennison Corporation. All rights reserved. The "Making Possible" tagline, Avery Dennison and all other Avery Dennison brands, product names and codes are trademarks of Avery Dennison Corporation. All other brands or product names are trademarks of their respective owners. Fortune 500® is a trademark of Time, Inc. Branding and other information on any samples depicted are fictitious. Any resemblance to actual names is purely coincidental.